

VISIO INTERLOCKING TILE



Introducing Visio: A precision-engineered, flat interlocking tile crafted in Europe. Its sleek, smooth surface boasts clean lines, enhanced by a double sidelock on the left vertical edge for added strength and optimal water shedding. With two factory-formed attachment holes, Visio ensures easy mechanical installation. The tile's backside features strategic stiffening ribs, reducing weight, fortifying structure, and maintains an installed weight of under 1,000 lbs. per square.

PHYSICAL CHARACTERISTICS

| CHARACTERISTIC | VISIO INTERLOCKING TILE | PROFILE |
|-------------------|--|---------|
| Weight Per Square | 890 lbs. | |
| Pieces Per Square | 113 pcs. | |
| Weight Per Pallet | 2,400 lbs. | |
| Pieces Per Pallet | 300 pcs. (2.65 SQ/pallet) | |
| Overall Size | 10 7/16" w. x 17 3/4" ht. x 1 3/8" thickness | |
| Exposure | 8 11/16" w. x 14 3/4" ht. x 1 3/8" thickness | |
| Minimum Slope | 3:12** | |
| Color Blends | Matte White | |
| Base Texture | Smooth | |

**In considering slopes less than our recommended minimum, please see Ludowici's Roof Slope Whitepaper available from your local sales representative.

APPROVALS & CERTIFICATIONS

- ◆ ASTM C1167 Grade 1 Roof Tile
- ◆ Miami-Dade NOA No.: 24-9026.06
- ◆ State of Florida Approval No: FL 13777

LUDOWICI WARRANTY

Ludowici imported tiles carry a limited 50-year material warranty. Contact Ludowici for warranty information on imported tiles. Imported tile warranties differ from Ludowici's 75-year material warranty for products produced in New Lexington, Ohio.




DESIGN ATTRIBUTES

- ◆ Terra cotta: energy efficient, green and sustainable
- ◆ Double sidelocks designed to ensure proper water shedding
- ◆ (2) factory formed nail holes for mechanical attachment
- ◆ No lugs on tile back allow for easy direct to deck attachment (no battens required)
- ◆ 1-1/8" Deep stiffening ribs remove overall tile weight while increasing tile strength (breaking strength of 520 LBS on average)

Photos are for representation purposes only and should not be used for final product selection. Tiles ordered should be chosen from actual samples available at the time of order. Ludowici reserves the right to alter and adjust products, colors and finishes at any time. Please contact a sales representative for more information.

VISIO INTERLOCKING TILE

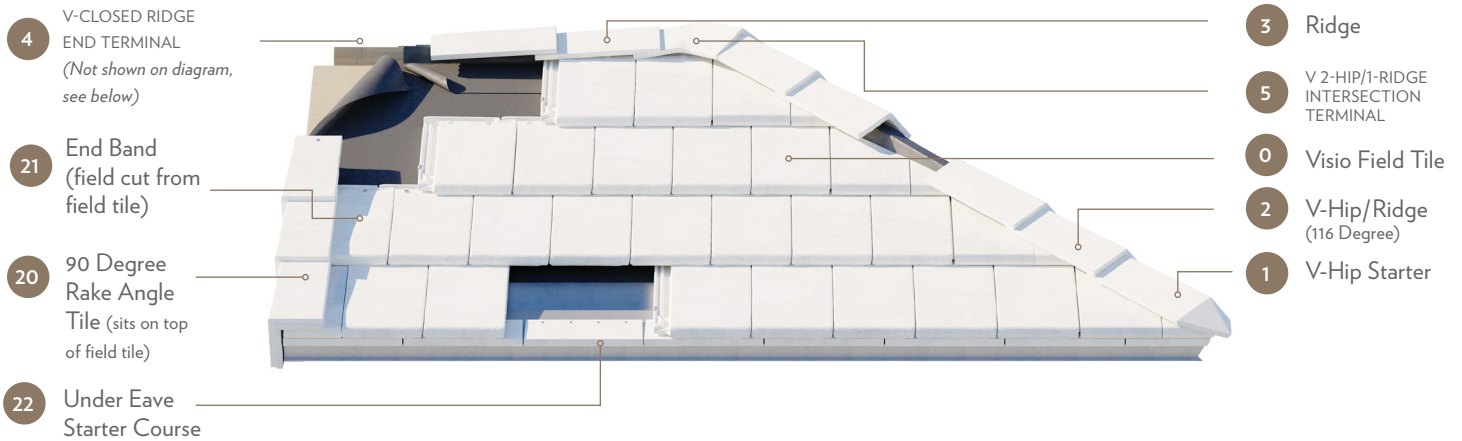

| CREATON VISIO INTERLOCKING TILE SYSTEM (WITH LUDOWICI ACCESSORIES) | | | | | | | |
|---|-----------------------------|--------------------|---------------------------------|-------------------------------------|--|---------------------------------|---------------------------------|
| PROFILE | 0 VISIO FIELD TILE | 1 V-HIP STARTER | 2 3 V-HIP/RIDGE (116 DEGREE) | 4 V-CLOSED RIDGE END TERMINAL | 5 V 2-HIP/1-RIDGE INTERSECTION TERMINAL | 20 90 DEGREE RAKE ANGLE TILE | 22 UNDER EAVE STARTER COURSE |
| Image | | | | | | | |
| Item Number | CRE299971 | 021417 | 000172 | Starter: 021421 Finisher: 047038 | 210199: V 2-Hip/ 1-Ridge Terminal – A Pitch (4:12, 5:12, 6:12) Starter 210200: V 2-Hip/ 1-Ridge Terminal – A Pitch (4:12, 5:12, 6:12) Finisher 011937: V 2-Hip/ 1-Ridge Terminal – B Pitch (7:12, 8:12, 9:12) Starter 021457: V 2-Hip/ 1-Ridge Terminal – B Pitch (7:12, 8:12, 9:12) Finisher | 255813 | 014749 |
| Overall Size | 10-7/16" x 17-3/4" x 1-3/8" | 15-1/2" L. | 14-1/2" L. | 14-1/2" L. | N/A | 17-3/4" L. | 12" |
| Exposure | 8-11/16" x 14-3/4" x 1-3/8" | 12" | 12" | 12" | N/A | 14-3/4" | 12" |
| Pieces Per Square | 113 | N/A | N/A | N/A | N/A | N/A | N/A |
| Weight Per Piece | 7.96 LBS | 8.00 LBS | 7.40 LBS | 8.00 LBS | 15.00 LBS | 8.4 LBS | 2.30 LBS |
| Weight Per Square | 890 LBS | N/A | N/A | N/A | N/A | N/A | N/A |
| Pieces Per Box/Pallet | 240 PCS | 4.00 PCS | 38.00 PCS | 4.00 PCS | 2.00 PCS | 32 PCS | 100 PCS |



2-1/4" Sidelock Windclip
(Item #C2.25)